

NEW TYRE RELEASE DOCUMENT (NTRD)

NTRD No.: X-976

Galaxy LHD 510 SDS (Standard Heel/With Aperture) 29.5-25 (25.00-25 Rim)

Release Type: Full Release

Release Region: Global

Marketing Dept.

Month: April 2021

Version:01

Prepared by: Abhinav Bura

Date: 07/04/2021

Checked by: Rajendra Nagapurkar

Date: 07/04/2021

This document is created to register the marketing communication collaterals and process details for the launch of the above mentioned pattern; it is intended for internal circulation and approval for further dissemination. All facts and figures mentioned in the document is true to the best of our knowledge as on the above said date, for updated information please feel free to visit the website www.Yokohama-ohd.com

New Tire Release Document

NTRD No: X-976

Release Month:	April 2021
Brand (Logo):	GALAXY
Tread pattern:	LHD 510 SDS
Size:	29.5-25(SH/With Aperture)
Rim Size	25.00-25
Catalogue No.:	578491-33
Main Applications:	 Wheel Loader



Feature	Advantage	Benefit
Special Compound	Chip & Chunk Resistant	Suitable for severe application
Sidewall aperture	- Improve ride comfort - Reduce heat buildup	Reduce driver fatigue
Deep Grooves	Provides Superior traction	Avoid slippage or sliding during operation

Product Description:

Tread pattern of LHD 510 SDS is designed with deep groove on the shoulder to provide superior traction on all kind of surfaces. Compound formulation used in the construction of LHD 510 enhances its resistance toward chipping and chunking and minimize heat buildup to maximize tire life. Sidewall aperture improves driver's comfort on hard and uneven surface.

Technical Data

Pattern	LHD 510 SDS
Brand	Galaxy
Size	29.5-25
TRA Code	NA
Application	Wheel Loader
No. of Lugs	20
Tire Weight Kgs / (lbs)	1851.0/(4080.8)
NSD (mm/(1/32 inch))	109.0/(137.3)
TT/TL/Solid	Solid
OD mm/(inch)	1859.0/(73.2)
SW mm/(inch)	760.0/(29.9)
Wear Limit (60J) (mm/(1/32 inch))	264.0/(332.6)
EAN Code	8903635047117
Tire Warranty	5 Years

Performance Parameters (out of 10)

Traction	★★★★★★★★
Tire Life	★★★★★★★★
Duty Cycle	★★★★★★★★
Surface	Hard Surface


Structural Difference: NA

Compound Type: Chip and Chunk Resistant

Load Table

SIZE	RIM	LOAD CAPACITY (kg), (<i>lbs</i>)
		LOADER
		SPEED (10 km/h), (<i>6 m/h</i>)
29.5-25	25.00-25	25900 (kg)
		57100 (<i>lbs</i>)

Sidewall Stamping

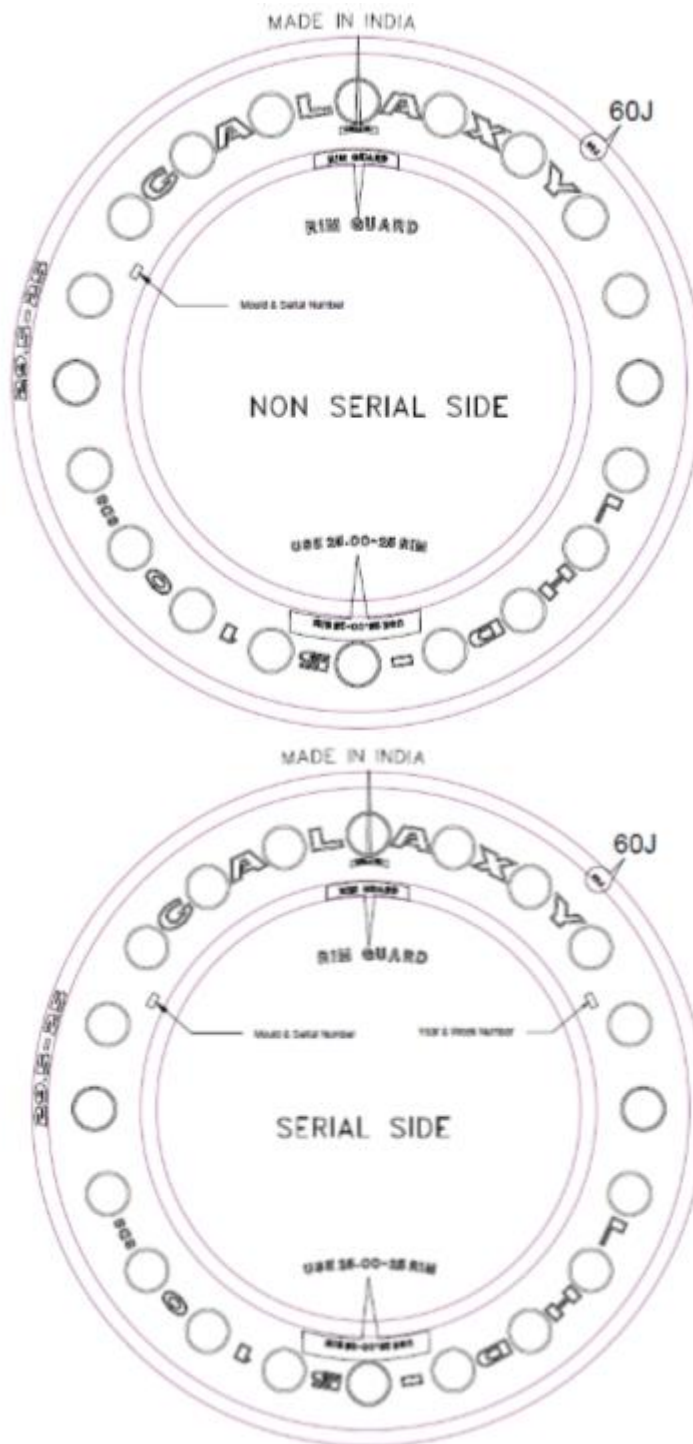

For further enquiries, please write to abura@yokohama-oht.com

Yokohama Off-Highway Tires is a fully owned subsidiary of the Yokohama Rubber Co. Ltd. With a presence in 120 countries, across 6 continents, we specialize in the development manufacturing and sale of Off-Highway Tires. One of the fastest-growing companies in the segment. We have a wide range of offerings for Agricultural, Forestry, Industrial and OTR tires from three world-renowned brands - Alliance, Galaxy and Primex. Our mission is to deliver superior value to our customers through a focus on innovation, technology and cost-efficient manufacturing and distribution practices.

ATC Tires Pvt. Ltd, India
#1001, Tower A, Embassy 247,
LBS Marg, Vikhroli (W), Mumbai 400 083
Tel: +91 22 3957 9600

Alliance Tire Company Ltd, Israel
PO BOX No. 48, Hadera 38100 Israel,
Tel: +972 4 624 0520

Alliance Tire Europe BV
De Entree 59, 1101 BH Amsterdam,
Zuidoost, The Netherlands,
Tel: +31 (0) 20 21 84 770

Yokohama Off-Highway Tires America Inc.
201 Edgewater Drive, Suite 285, Wakefield,
MA 01880, Tel: 339-900-8080